**ANNUAL MONITORING REPORT 2005 GROUNDWATER QUALITY AND** MONITORING WELL PERFORMANCE

MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA **PERMIT NO. 67-SDP-1-75P** 

> Terracon Project No. 40915034 November 30, 2005



I hereby certify the portion of this engineering document described below was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of lowa.

David M. Svingen

Certificate No. 11802

Pages or sheets covered by this seal: \_\_\_\_Annual Report 2005

Pages 1 - 8; Appendix A - Figures 1 - 6; Appendix B;

Appendix C - Tables 1 - 3

Date Issued:

License Renewal Date:

12/31/05

Prepared for:

MONONA COUNTY SANITARY LANDFILL COMMISSION Monona County, Iowa

Prepared by:

TERRACON CONSULTANTS, INC. Omaha, Nebraska



November 30, 2005



Terracon Consultants, Inc. 2211 South 156th Circle Omaha, Nebraska 68130-2506 Phone 402.330.2202 Fax 402.330.7606 www.terracon.com

Monona County Sanitary Landfill Commission c/o Mr. Harold Johnston 31342 State Highway 37 Turin, IA 51059

Terracon Project No. 40915034

Re: Annual Monitoring Report 2005
Groundwater Quality and Monitoring Well Performance
Monona County Sanitary Landfill
Monona County, Iowa
Permit No. 67-SDP-1-75P

Dear Mr. Johnston:

Enclosed is a report for the annual monitoring of groundwater quality and monitoring well performance for the Monona County Landfill. This report serves to meet lowa Department of Natural Resources (IDNR) annual monitoring reporting requirements set forth in IDNR's Regulations for Solid Waste Disposal, Chapter 103. This report does not, however, contain site inspection/special waste authorization information. We understand that site inspection/special waste authorization information is to be reported by Virtue Engineering, the registered design engineer as specified in the landfill's permit (No. 67-SDP-1-75P).

Thank you for the opportunity to be of continued service to you on this project. If there are any questions concerning this report, please contact us.

Sincerely,

TERRACON CONSULTANTS, INC.

Rod Baumann, P.G.

Project Geologist

David M. Svingen, P.E.,

Principal

Iowa License No. 11802

JLD/RMB/DMS:jld/lls

**Enclosure** 

Copies to:

Addressee (1)

\* Solid Waste Section DNR, Wallace State Office Building, 900 East Grand Avenue, Des

Moines, IA 50319-0034 (1)

IDNR, Field Office No. 4, 706 Sunnyside Lane, Atlantic, IA 50022 (1)

## **TABLE OF CONTENTS**

		age
1.0	INTRODUCTION	1
2.0	STATISTICAL CONSIDERATIONS	1
3.0	GROUNDWATER IMPACT DISCUSSIONS	2
3.1	MW-5 (Up-Gradient Well)	3
3.2	MW-4 (Down-Gradient Well)	
3.3	MW-3 (Down-Gradient Well)	4
3.4	MW-2 (Down-Gradient Well)	4
3.5	MW-1 (Down-Gradient Well)	5
4.0	MONITORING WELL PERFORMANCE	6
4.1	Well Location Evaluation [110.9(2)a]	
4.2	Effects of Landfill Operations on Hydrogeologic Setting [110.9(2)b]	
4.3	Well Sedimentation [110.9(2)c]	7
4.4	Periodic In-Situ Permeability Tests [110.9(2)d]	7
5.0	LEACHATE WELL MONITORING	8
6.0	GENERAL COMMENTS	8
APPE	ENDIX A - FIGURES	
Figure	e 1 - Location Diagram	
_	re 2 - Regional Topographic Map	
_	e 3 - HMSP Monitoring Point Locations	
•	e 4 - Water Table Contour Map - January 2005	
_	re 5 - Water Table Contour Map – April 2005	
•	•	
Figur	re 6 - Water Table Contour Map - October 2005	
APPE	ENDIX B - STATISTICAL SUMMARY SHEETS AND GRAPHS	
APPE	ENDIX C - TABLES	
Table	e 1 - Summary of Groundwater Elevation Measurements	
	e 2 - Summary of Leachate Measurements	
	e 3 - Summary of Hydraulic Conductivity Measurements	

## ANNUAL MONITORING REPORT 2005 GROUNDWATER QUALITY AND MONITORING WELL PERFORMANCE

Monona County Sanitary Landfill Monona County, Iowa Permit No. 67-SDP-1-75P

Terracon Project No. 40915034 November 30, 2005

#### 1.0 INTRODUCTION

The subject site is an existing landfill operating under Iowa Department of Natural Resources (IDNR) permit number 67-SDP-1-75P, in Monona County of western Iowa. The Monona County Landfill is located within the Southwest <sup>1</sup>/<sub>4</sub> of Section 13, in Township 83 North, Range 44 West, in Monona County, Iowa and its location is depicted in Figures 1 and 2 (Appendix A).

Terracon has completed semi-annual water quality sampling and analysis for the 2005 calendar year at the Monona County Landfill in general accordance with the IDNR approved Hydrologic Monitoring System Plan (HMSP), dated February 28, 1995. Semi-annual monitoring consisted of sampling and analyzing groundwater from a total of five water table monitoring wells (one upgradient well and four down-gradient wells). Surface water sampling and analysis at two locations is also part of the HMSP, but surface water was not present during sampling episodes and was, therefore, not collected. The wells and surface water sampling locations are depicted in Figure 3 (Appendix A). Sampling was performed on the following dates:

- April 28, 2005
- October 21, 2005

Water samples were analyzed for routine annual and semi-annual parameters as specified in Section 103.2(4)e and 103.2(4)f of the Iowa Administrative Code (IAC). Laboratory reports, chain-of-custody documentation, and field data forms have been previously submitted to the IDNR for each semi-annual monitoring event. Copies of these semi-annual documents are retained at the Monona County Landfill.

### 2.0 STATISTICAL CONSIDERATIONS

Monitoring well MW-5 was considered as the up-gradient location in the water quality monitoring program for semi-annual parameters in groundwater. Surface water was not

collected during the background monitoring period and statistical analyses were, therefore, not performed for surface water.

Statistical evaluation of temperature has not been included since temperature data, to a large degree, is dependent upon ambient conditions. Ambient conditions may cause temperature readings to deviate from actual groundwater conditions as a result of the method used to measure groundwater temperatures. Nevertheless, temperatures recorded during the background sampling events do not indicate obvious indications of temperature fluctuations which may be the result of endothermic or exothermic chemical reactions.

Control bounds were computed in general accordance with guidelines set forth in IAC 103.2(6). One-half of the laboratory method detection limit (MDL) was used in statistical computations in instances where chemicals were reported at concentrations below the MDL.

Laboratory analytical summary sheets for each sampling location have been provided in Appendix B. Graphs with control limits showing the concentrations versus time for sampling locations are also included in Appendix B. The semi-annual and annual parameters given statistical consideration are as follows:

Chloride

Chemical Oxygen Demand (COD)

Iron (dissolved)

Ammonia Nitrogen

рH

Specific Conductance
Total Organic Halogens

Phenols (total)

## 3.0 GROUNDWATER IMPACT DISCUSSIONS

Discussion in this section is provided for chemical parameters that fall outside of the upper and lower control limits on a well-by-well basis. Chemical parameters which fall within established control limits are not discussed. Well discussions are presented in reverse order of the well number system (i.e. well MW-5 is discussed first and well MW-1 is discussed last) since this order generally follows an up-gradient to down-gradient progression.

Upper and lower control limits for each of the monitoring wells (MW-1 through MW-5) were based on data obtained for up-gradient well MW-5 as required by IAC Chapter 103.2(b). In some cases, upper and lower control limits are equivalent due to non-detection of certain parameters since monitoring began. In this case, analyte concentrations plot on a single control bound line (no deviation from the mean of the data) instead of between upper and lower control bounds.

## 3.1 MW-5 (Up-Gradient Well)

Analytes whose concentrations fall outside of the control limits established from up-gradient well MW-5 are as follows:

- Chemical Oxygen Demand: The June 29, 1996 data point plotted above the upper control limit. Compared to the other data points on the graph, the data point exceeding the upper control limit appears to be anomalous. Monitoring after the June 29, 1996 measurement indicates that the suspect data point is anomalous and not consistent with other monitoring data for chemical oxygen demand at MW-5.
- Ammonia Nitrogen: The October 22, 2003 data point plotted above the upper control limit. Prior and subsequent ammonia concentrations have not been detected in well MW-5 and the October 22, 2003 data point appears to be anomalous at this time.
- pH: The October 28, 1997 data point on the pH graph for MW-5 is anomalously low. The anomalous value of this data point may be attributable to error of the field instrument used to measure pH. Monitoring data for sampling events proceeding and subsequent to the October 28, 1997 measurement indicates that the data point is anomalous and not consistent with other monitoring data for pH at MW-5.
- **Specific Conductance:** The April 28, 1998 data point plotted marginally below the lower control limit. This marginal deviation from the control limits is not considered to be statistically significant.

## 3.2 MW-4 (Down-Gradient Well)

Analytes whose concentrations fall outside of the control limits established from up-gradient well MW-5 are as follows:

- Iron: Any detection of iron in a down-gradient well will fall outside the control limits established by up-gradient well MW-5. The June 29, 1996 data point plotted above the control limits but appears to be anomalous, based on data which precedes and follows the suspect sampling date. The anomalous iron concentration is not consistent with other monitoring data for iron at MW-4.
- Ammonia Nitrogen: The October 22, 2003 data point plotted above the upper control limit. Prior and subsequent ammonia concentrations have not been detected in well MW-4.

• **Specific Conductance**: The August 30, 1996, October 20, 1996, October 28, 1997, and April 28, 1998 data points plotted marginally below control limits. The remaining data points are within the control limits. The suspect data points do not warrant concern at this time.

## 3.3 MW-3 (Down-Gradient Well)

Analytes whose concentrations fall outside of the control limits established from up-gradient well MW-5 are as follows:

• **Specific Conductance:** The October 28, 1997 data point plotted marginally below control limits. The remaining data points are within the control limits. The suspect data point does not warrant concern at this time.

## 3.4 MW-2 (Down-Gradient Well)

Analytes whose concentrations fall outside of the control limits established from up-gradient well MW-5 are as follows:

- Chloride: Many of the data points plotted above the upper control limit for chloride.
   Although the chloride concentrations may be indicative of impact from the landfill, the graph indicates decreasing concentrations. Data for the past three years has been within control limits.
- Chemical Oxygen Demand: The June 29, 1996 and May 2, 2003 data points
  plotted above the upper control limit for specific conductance. Other data points
  plotted within the control limits. These two data points do not warrant concern at this
  time. In particular, the May 2, 2003 data point may be anomalous.
- Iron: Any detection of iron in a down-gradient well will fall outside the control limits established by up-gradient well MW-5. The October 24, 1999; April 26, 2000; and October 15, 2002 data points plotted above the upper control limit for iron. At this time, it appears that the detections of iron are anomalous and not consistent with other monitoring data for iron at MW-2. Continued monitoring will allow for further assessment of potential iron impact at well MW-2.
- Ammonia Nitrogen: The October 15, 1998 data point plotted above the upper control limit for ammonia. It appears that the detection of ammonia is anomalous and not consistent with other monitoring data for ammonia at MW-2.

- Total Organic Halogens: Any detection of total organic halogens in a down-gradient well will fall outside the control limits established by up-gradient well MW-5. Detections of total organic halogens have occurred for most monitoring events where sampling and analysis for routine annual parameters was performed. Results are consistent with detection of 1,1,1-trichlorethane (TCA) compounds made during quarterly background monitoring which took place in 1996. TCA concentrations reported at that time were below the lowa numerical action level of 200 µg/l. The 200 ug/l is currently a numeric standard for protected groundwater sources in lowa and is also a federal drinking water standard (health advisory level and maximum contaminant level). A review of the graph shows a decreasing concentration trend over the past several years.
- Specific Conductance: Several data points plotted above the upper control limit for specific conductance. Based on other indications of groundwater impact at well MW-2 (i.e. total organic halogens and chloride), the specific conductance concentrations may be indicative of impact from the landfill. Continued monitoring will allow for further assessment of elevated specific conductance at well MW-2.

## 3.5 MW-1 (Down-Gradient Well)

Analytes whose concentrations fall outside of the control limits established from up-gradient well MW-5 are as follows:

- Chemical Oxygen Demand: The June 29, 1996 data point plotted above the upper control limit for chemical oxygen demand. It appears that the detection is anomalous and not consistent with other most other monitoring data for chemical oxygen demand at MW-1.
- Iron: Any detection of iron in a down-gradient well will fall outside the control limits established by up-gradient well MW-5. Dissolved iron has been detected several times since monitoring began in 1995. The detectable iron concentrations plotted above the upper control limit but appear to be sporadic. Based on other indications of groundwater impact at well MW-1 (i.e. total organic halogens), the dissolved iron concentrations may be indicative of impact from the landfill. However, the sporadic nature of dissolved iron detections is enigmatic.
- Ammonia Nitrogen: Ammonia nitrogen was detected during the October 15, 1998
  monitoring event. The detectable ammonia nitrogen concentration plotted
  marginally above the upper control limit but appears to be anomalous and not
  consistent with other monitoring data for ammonia nitrogen at MW-1.

- Total Organic Halogens: Any detection of total organic halogens in a down-gradient well will fall outside the control limits established by up-gradient well MW-5. Detections of total organic halogens have occurred during several monitoring events where sampling and analysis for routine annual parameters was performed. Specific halogenated VOCs were not detected in groundwater from MW-1 during quarterly background sampling performed in 1996, as they were in groundwater from well MW-2. Wells MW-1 and MW-2 are located at the down-gradient side of the landfill (see Figure 3, Appendix A).
- **Specific Conductance:** Several of the more recent sampling events have revealed specific conductance values plotting above the upper control limit. Continued monitoring will allow for further assessment of recent increased specific conductance at well MW-1.

#### 4.0 MONITORING WELL PERFORMANCE

The current site monitoring instruments were evaluated in general accordance with the approved Hydrologic Monitoring System Plan, dated February 28, 1995. The purpose of this evaluation was to assess whether the integrity of groundwater monitoring instruments is sufficient to adequately monitor groundwater at the landfill as described in the approved HMSP.

## 4.1 Well Location Evaluation [110.9(2)a]

For the 2005 calendar year, groundwater elevation measurement events for five water table monitoring wells (see Figure 3, Appendix A) were conducted monthly by landfill personnel and during semi-annual monitoring by Terracon. The results of these events have been tabulated in Table 1 (Appendix C).

Water levels of individual wells have remained relatively consistent over the past year. In other words, no significant variation in water level fluctuations have occurred for individual wells over the course of the monitoring period. Water levels at MW-1 and MW-2 have remained within the screened interval throughout the year. Water levels measured in wells MW-3, MW-4, and MW-5 were usually above each well's screened interval with some exception. This comparison is made in Table 1 (Appendix C). Water levels outside of the screened interval were within 3 feet of the top of the well screen at well MW-3; within 1½ feet of the top of the well screen at well MW-4; and within 2 feet above the well screen in well MW-5.

Ideally, water levels should be within the screened interval for water table monitoring wells, particularly to monitor for the presence of non-aqueous phase liquids (NAPLs) which collect at the water table surface. However, evidence of the presence of NAPLs at the monitoring wells

was not observed in 2005. As long as such evidence of NAPL presence is not observed when the water table is within a few feet above the top of the screened interval, the well will suffice as a viable groundwater monitoring point.

The general direction of groundwater flow was evaluated for each month's data. The general groundwater flow direction has not changed since groundwater flow was assessed in 1993 for the hydrogeologic assessment. To demonstrate this finding, water level data from three arbitrarily selected monitoring dates was used to construct water table contour maps (Figures 4, 5, and 6, Appendix A). The inferred groundwater flow direction shown on these maps is similar to the inferred groundwater flow direction depicted on maps presented in the hydrogeologic assessment report and previous annual groundwater monitoring reports.

Based on the above findings, the monitoring wells' positioning, with respect to well depth (vertical) and also with respect to location along the buried waste perimeter (lateral), continues to be adequate. Up-gradient and down-gradient well designations as described in the HMSP should continue to be used.

## 4.2 Effects of Landfill Operations on Hydrogeologic Setting [110.9(2)b]

Methods for landfilling of solid waste throughout 2005 have not varied significantly from original landfilling methods employed when landfilling commenced in 1975. Based on groundwater information discussed above in Section 4.1, it does not appear that landfill operations are altering the hydrogeologic setting at the landfill site.

## 4.3 Well Sedimentation [110.9(2)c]

According to the approved HMSP, well depths need to be measured annually to evaluate whether the wells are physically intact and not filling with sediment. Well depths were measured during semi-annual monitoring events and recorded on IDNR form 542-1322 which accompanied semi-annual analytical reports submitted to the IDNR and retained at the landfill. The results of these measurements, when compared with well depths depicted on boring logs included in the hydrogeologic assessment report (dated February 28, 1995), show that significant silting of site monitoring instruments has not occurred.

## 4.4 Periodic In-Situ Permeability Tests [110.9(2)d]

According to the approved HMSP, hydraulic conductivities are to be evaluated at monitoring instruments once every five years. Hydraulic conductivity evaluation of the monitoring instruments was performed during November of 1992, October of 1998, and October of 2003. Results of past hydraulic conductivity testing are summarized in Table 3 (Appendix C). Hydraulic conductivity testing is not scheduled to be conducted again until 2008.

Terracon

with the fire strate.

### 5.0 LEACHATE WELL MONITORING


Leachate levels were measured monthly by landfill personnel and during semi-annual monitoring by Terracon during 2005. Results of leachate measurements made at leachate wells (LW-1, LW-2, and LW-3) are summarized in Table 2 (Appendix C). Locations of leachate wells are depicted in Figure 3 (Appendix A).


Leachate in well LW-2 has reportedly been bailed on a monthly basis by landfill personnel to reduce leachate. Manual bailing occurs following monthly leachate measurements if leachate thickness is observed to be greater than about 1½ feet. The bailing is conducted until significant leachate volume can no longer be retrieved from the leachate well. Leachate liquid is reportedly stored in a holding tank at a waste transfer station located about one mile northwest of the landfill. Arrangements for disposal of the leachate are made with the Onawa waste water treatment plant.


## **6.0 GENERAL COMMENTS**


The analysis and opinions expressed in this report are based upon data obtained from the monitoring wells installed at the indicated locations and from any other information discussed in this report. This report does not reflect any variations in subsurface chemistry, stratigraphy, or geohydrology which may occur between borings or across the site. Actual subsurface conditions may vary and may not become evident without further exploration.


This report is prepared for the exclusive use of our client for specific application to the project discussed and has been prepared in accordance with generally accepted environmental engineering practices. No warranties, either express or implied, are intended or made. In the event any changes in the nature or location of observed conditions as outlined in this report are found, this report cannot be considered valid unless these changes are reviewed and the opinions of this report are modified or verified in writing by Terracon.

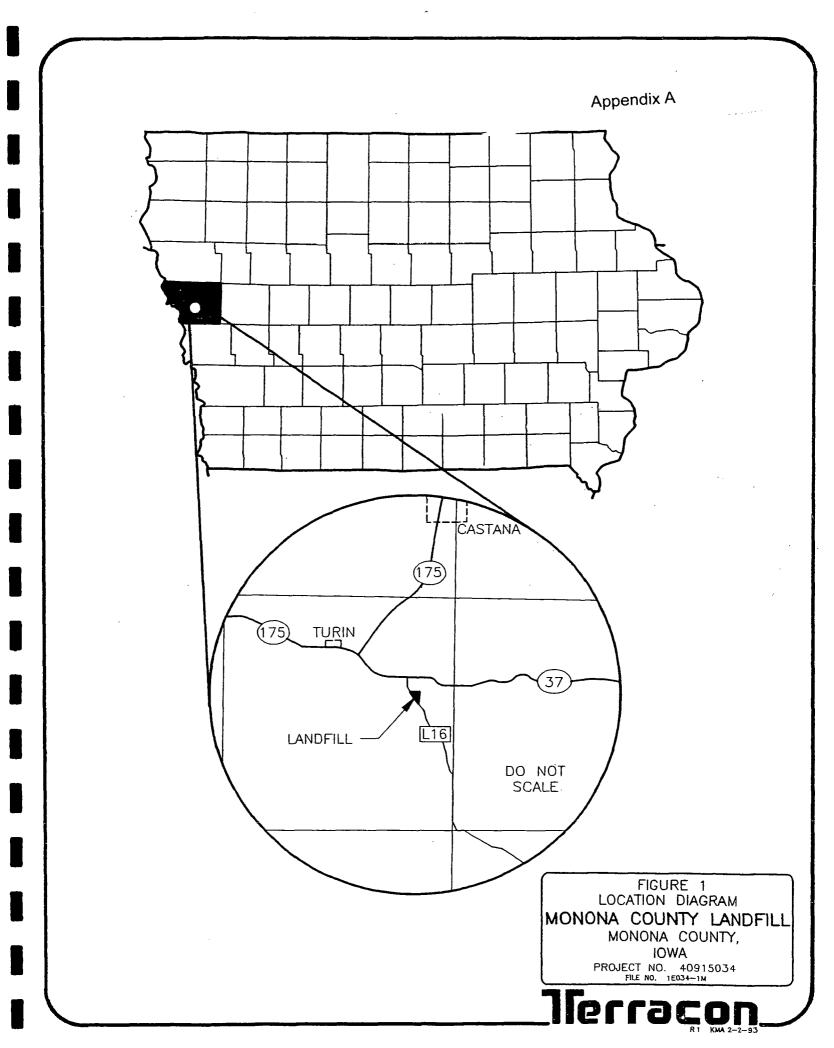


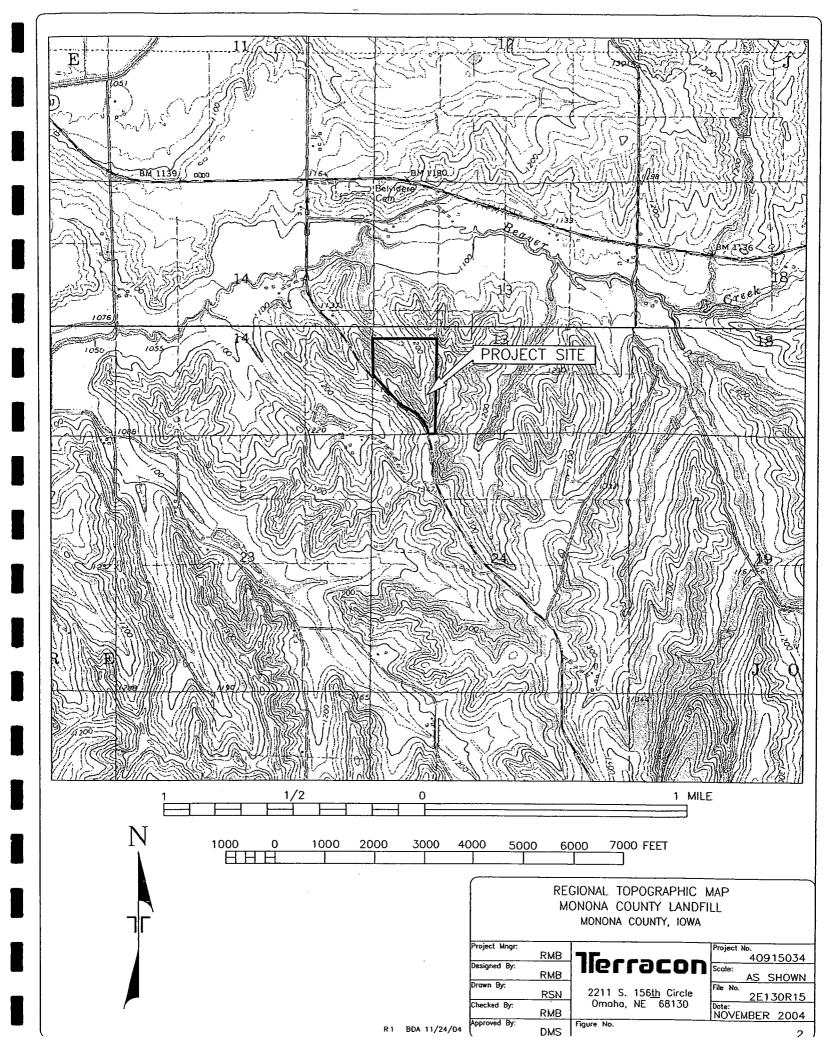

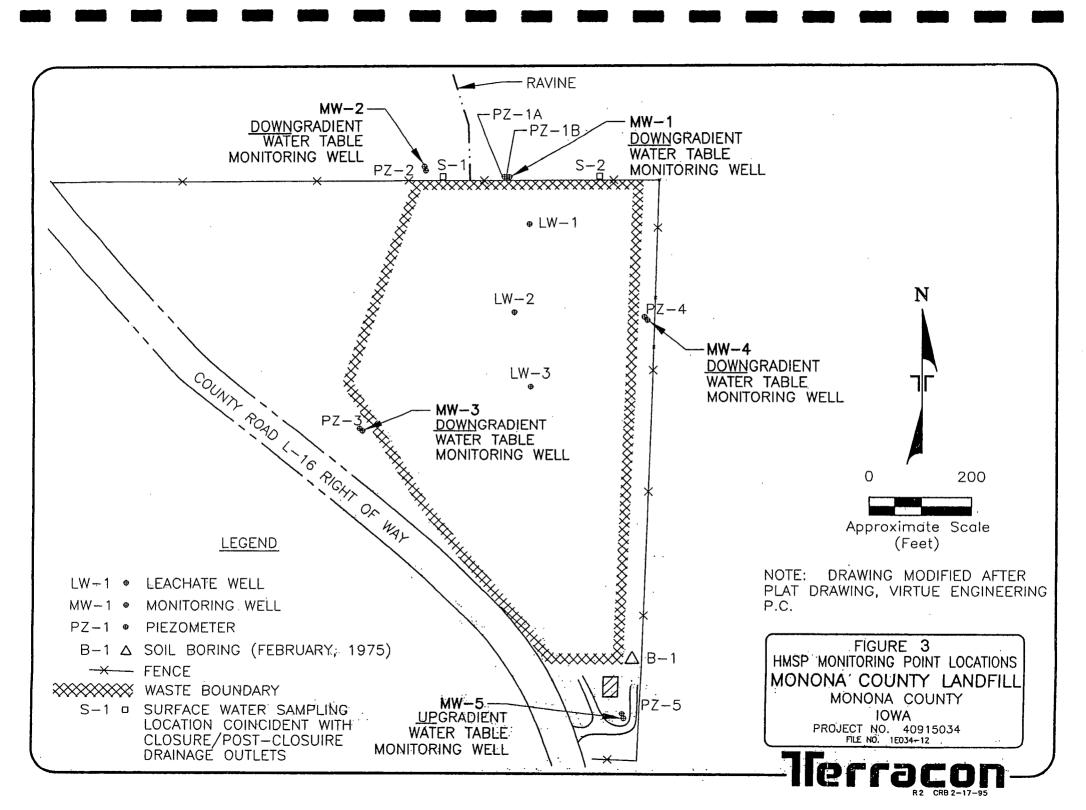

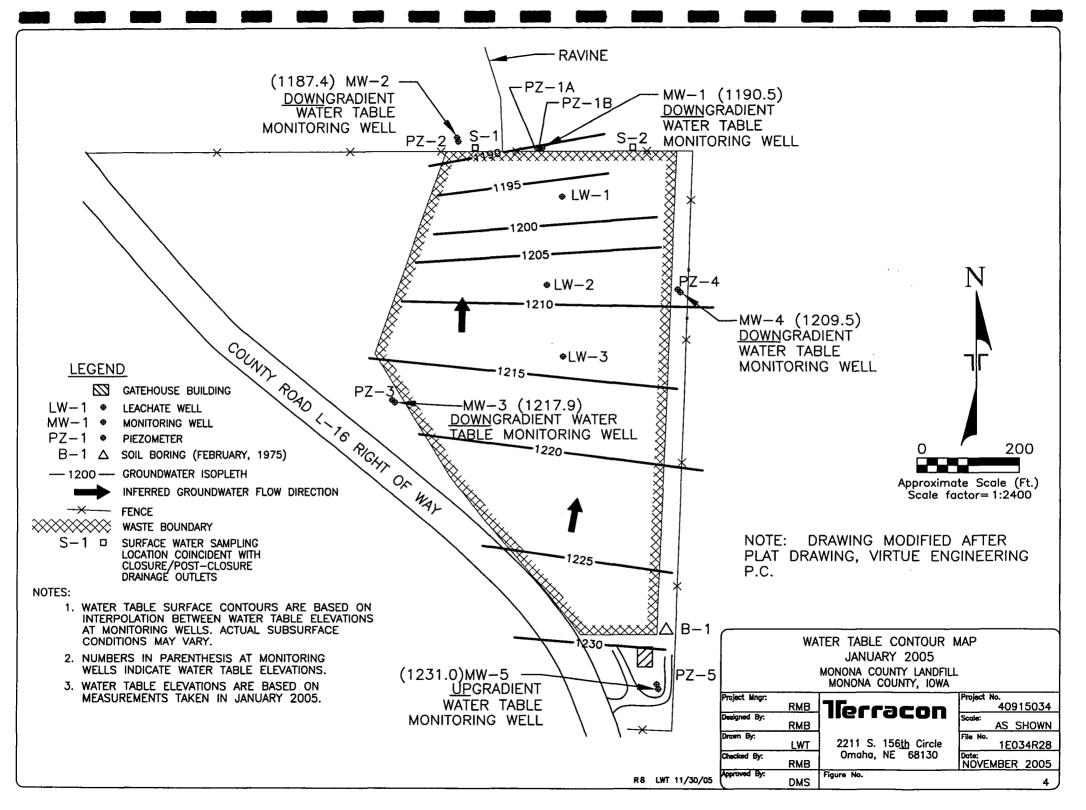

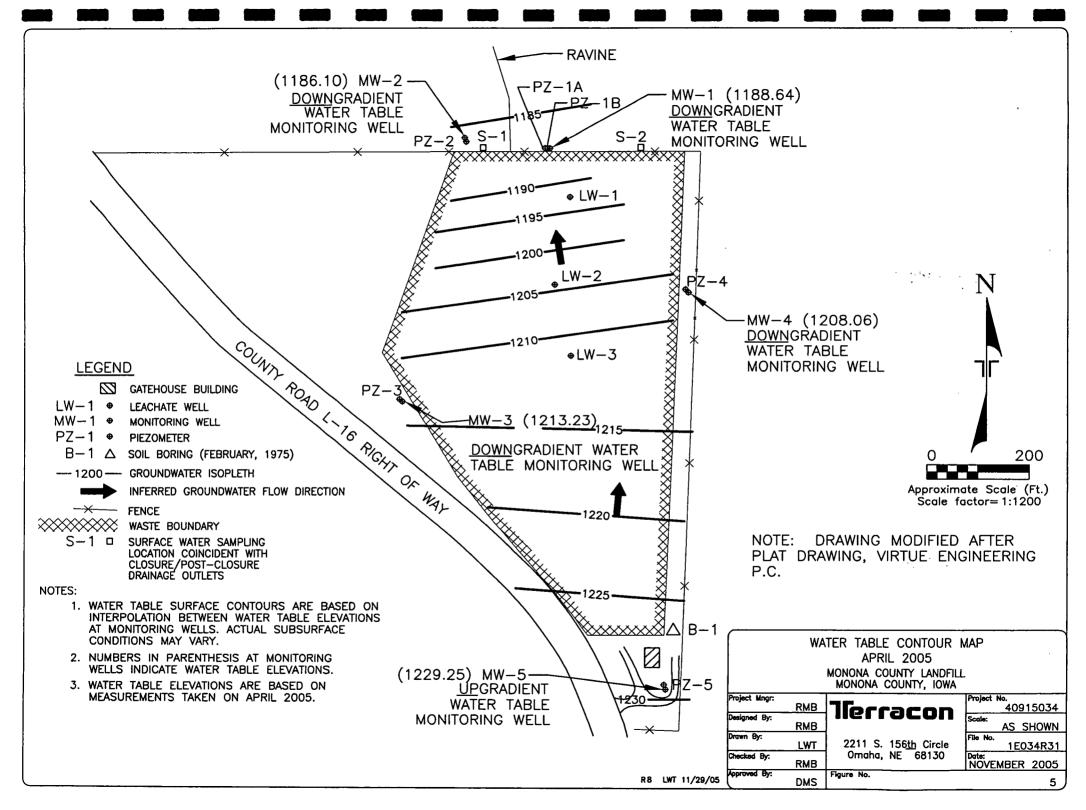

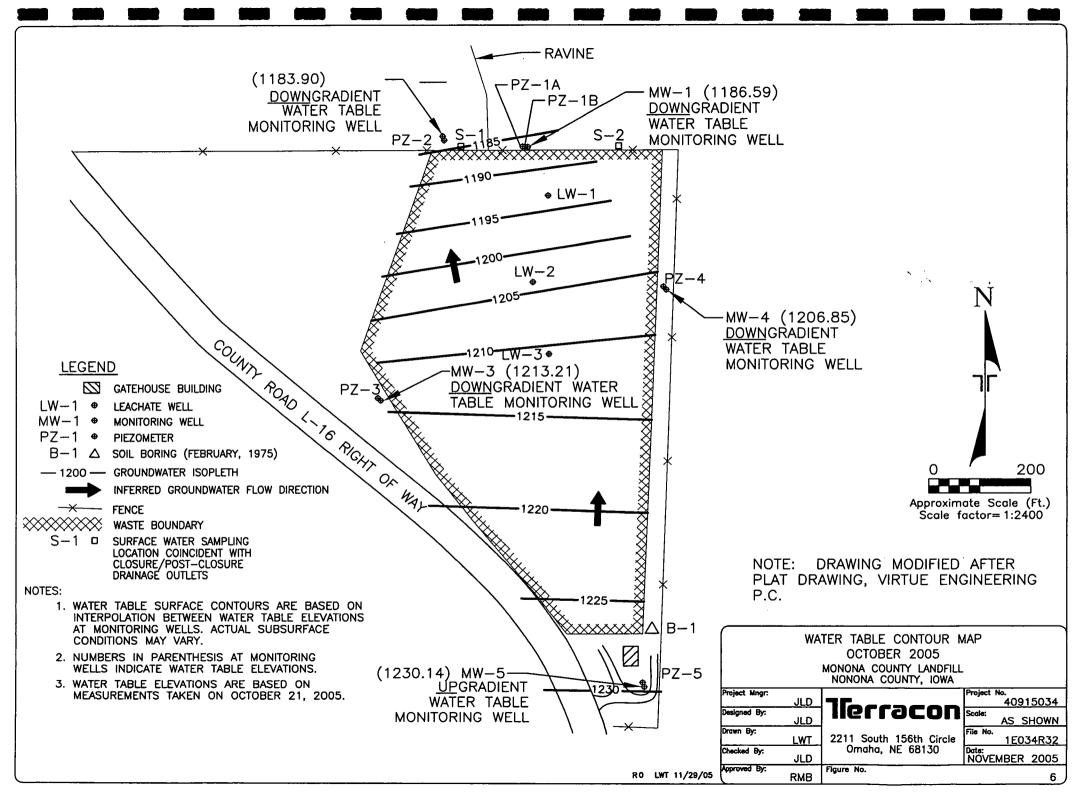

Appendix B

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-5

(Up-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:

TERRACON

	Stat	tistical Con	siderations														
	Upper	Lower		• ••	1					S	AMPLE DA	re					
PARAMETER	Control	Control	MW-5	MW-5													
	Limit	Limit	Standard	Mean	10/20/1995	3/29/1996	6/29/1996	8/30/1996	10/20/1996	5/27/1997	10/28/1997	4/28/1998	10/15/1998	4/20/1999	10/24/1999	4/26/2000	10/26/2000
	via MW-5	via MW-5	Deviation														
Laboratory Parameters																	
Chloride (mg/l)	22.2	1.34	5.20	11.75	2.5	2.5	5.8	5.4	6.7	9.3	9.9	12	9.8	11	11	11.6	12
Chemical Oxygen Demand (mg/l)	13.2	0.00	4.58	4.06	2.5	2.5	24	2.5	2.5	5.9	5.7	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/i)	0.05	0.05	0.00	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.08	0.12	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	-	-	-	-	0.01	-	0.01	0.01	-	0.01	-	0.01	•
Total Organic Halogens (mg/l)	0.005	0.005	0.00	0.01	-	-	-	-	0.005	-	0.005	0.005	-	0.005	-	0.005	-
Field Parameters	<b>-</b>							-				<del></del>					
pH (SU)	8.09	5.60	0.62	6.85	6.7	7.4	7.20	7.2	7	6.8	4.3	7.1	6.8	7.4	7.0	7.0	7.2
Specific Conductance (umho/cm)	1184	589	149	887	889	1026	816	680	691	849	644	534	942	1000	970	822	1130

- 1) Results shown in bold represent one-half of the laboratory detection limit (MDL) (for parameters reported below the MDL).
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-5

(Up-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:


TERRACON

	Stat	Statistical Considerations												
	Upper	Lower							SAMPL	E DATE				
PARAMETER	Control	Control	MW-5	MW-5										
	Limit	Limit	Standard	Mean	4/27/2001	10/30/2001	4/22/2002	10/15/2002	5/2/2003	10/22/2003	4/30/2004	10/13/2004	4/28/2005	10/21/2005
	via MW-5	via MW-5	Deviation											
Laboratory Parameters	1							l i						
Chloride (mg/l)	22.2	1.34	5.20	11.75	11.2	12.6	11.3	13.3	17.0	16.8	18.3	19.1	20.7	20.4
Chemical Oxygen Demand (mg/l)	13.2	0.00	4.58	4.06	2.5	2.5	2.5	2.5	7.6	5.2	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.00	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.08	0.12	0.1	0.1	0.1	0.1	0.1	0.49	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	0.01	-	0.01	-	0.01	l - i	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.00	0.01	0.005	-	0.005	-	0.005	-	0.005	-	0.005	-
Field Parameters	<del> </del>									-				
pH (SU)	8.09	5.60	0.62	6.85	7.0	7.0	7.0	6.1	6.9	7.1	7.1	7.0	6.6	6.5
Specific Conductance (umho/cm)	1184	589	149	887	900	941	1022	771	912	1022	1011	805	1059	954

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) (for parameters reported below the MDL).
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

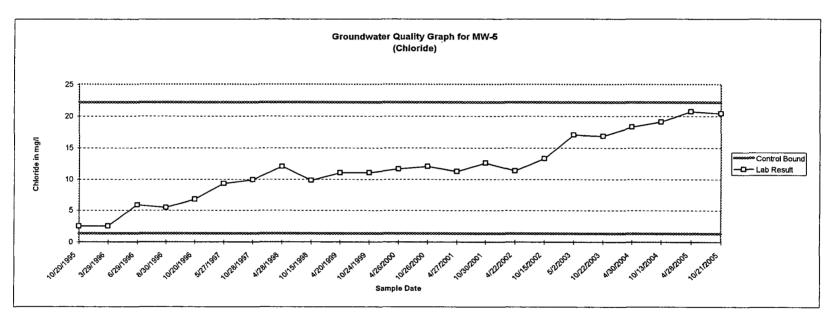

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well
- 2) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

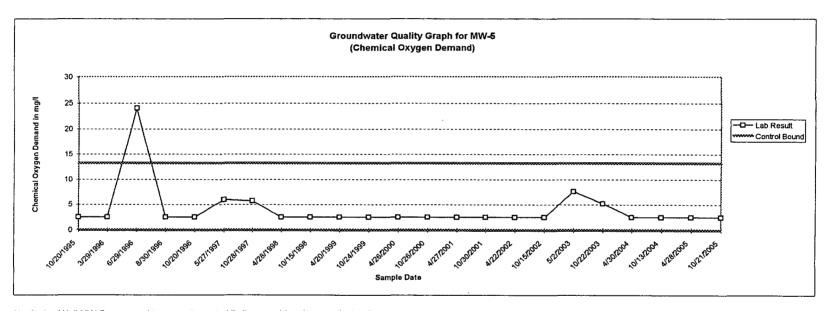

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up gradient well
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

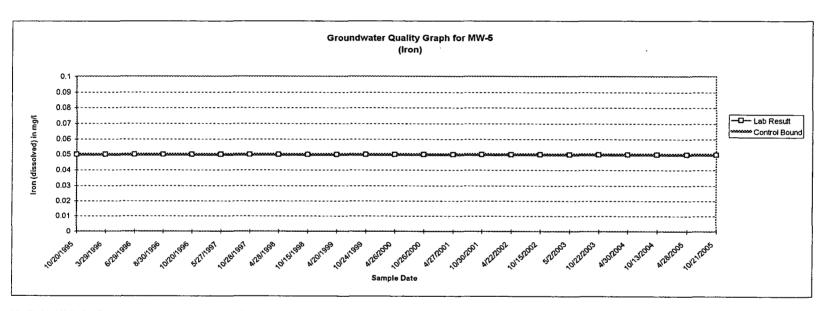

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

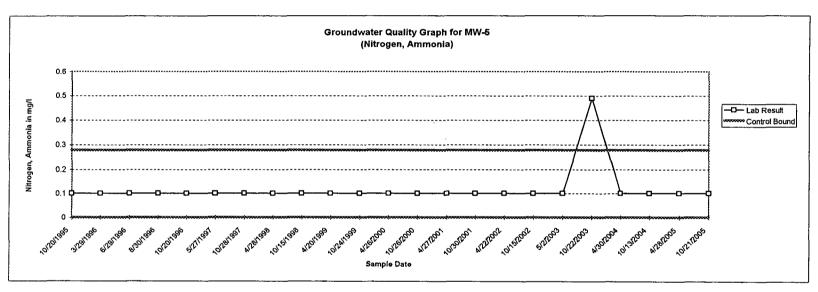

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limit of zero (0) was used for those parameters in which a negative lower control limit was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

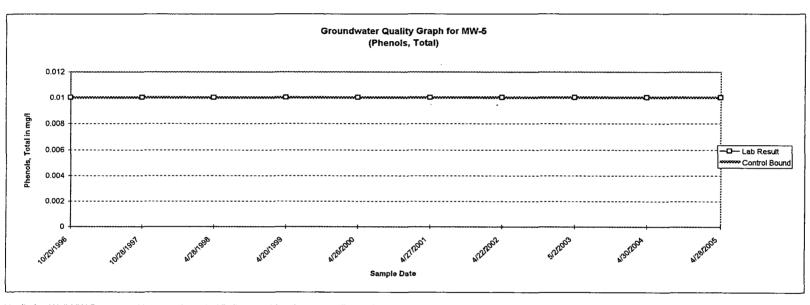

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

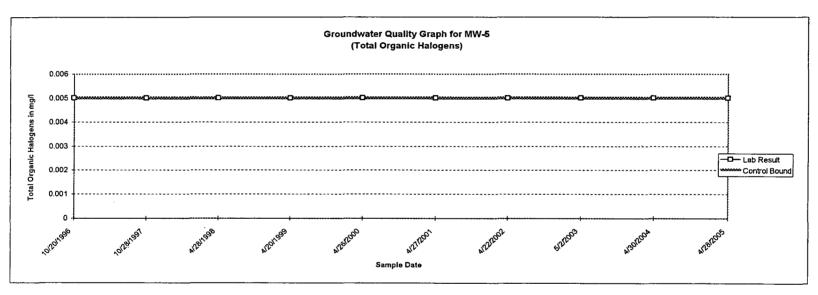

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

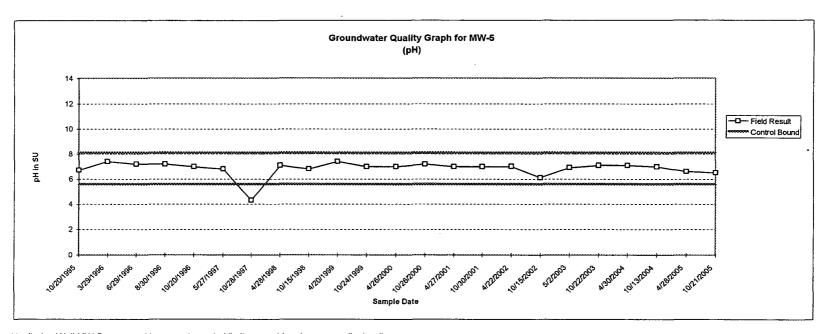

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS Terracon Project No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

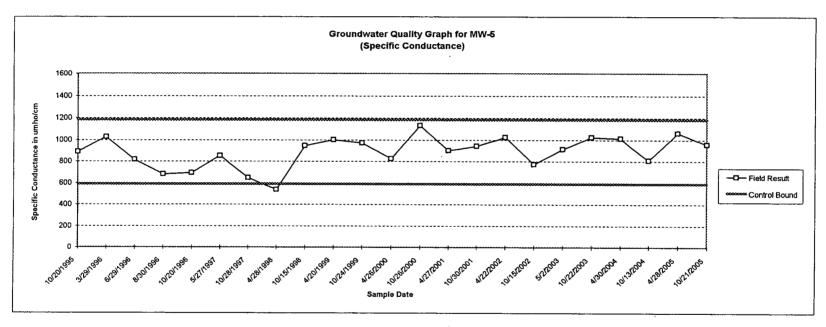

#### NOTE:

1) Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA **GROUNDWATER SAMPLING AND ANALYSIS** PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-4

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:

**TERRACON** 

Statistical Considerations								,				•					
	Upper	Lower			]					S	AMPLE DAT	ΓE					
PARAMETER	Control	Control	MW-4	MW-4													
	Limit	Limit	Standard		10/20/1995	3/29/1996	6/29/1996	8/30/1996	10/20/1996	5/27/1997	10/28/1997	4/28/1998	10/15/1998	4/20/1999	10/24/1999	4/26/2000	10/26/2000
	via MW-5	via MW-5	Deviation														
Laboratory Parameters													-				
Chloride (mg/l)	22.2	1.34	0.00	2.50	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Chemical Oxygen Demand (mg/l)	13.2	0.00	1.64	2.95	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.02	0.05	0.05	0.05	0.13	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.12	0.13	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Phenois, total (mg/l)	0.01	0.01	0.00	0.01	-	-	-	-	0.01		0.01	0.01	-	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.000	0.005	-	-	-	-	0.005	-	0.005	0.005	•	0.005	•	0.005	-
Field Parameters																	
pH (SU)	8.09	5.60	0.41	6.94	7.6	7.7	7.30	7.1	7.1	6.8	7.4	6.8	6.8	6.6	6.8	7.1	7.2
Specific Conductance (umho/cm)	1184	589	150	763	764	823	811	512	540	630	554	570	793	900	871	735	1118

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- 2) One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limit of zero (0) was used for those parameters in which a negative lower control limit was calculated.
  5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-4

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:


TERRACON

	Stat	istical Con	siderations	s		*****				*****				
	Upper	Lower			1				SAMPL	E DATE				
PARAMETER	Control	Control	MW-4	MW-4	l									
	Limit	Limit	Standard	Mean	4/27/2001	10/30/2001	4/22/2002	10/15/2002	5/2/2003	10/22/2003	4/30/2004	10/13/2004	4/28/2005	10/21/2005
<u> </u>	via MW-5	via MW-5	Deviation		·									
Laboratory Parameters														
Chloride (mg/l)	22.2	1.34	0.00	2.50	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Chemical Oxygen Demand (mg/l)	13.2	0.00	1.64	2.95	2.5	2.5	2.5	2.5	10	2.5	2.5	5.3	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.02	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.12	0.13	0.1	0.1	0.1	0.1	0.2	0.66	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	0.01	-	0.01	-	0.01	-	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.000	0.005	0.005	-	0.005	-	0.005	•	0.005	-	0.005	•
Field Parameters	<del>                                     </del>													
pH (SU)	8.09	5.60	0.41	6.94	7.0	7.1	6.8	6.0	6.8	7.0	7	7.2	6.2	6.3
Specific Conductance (umho/cm)	1184	589	150	763	780	782	986	607	778	772	875	691	923	735

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

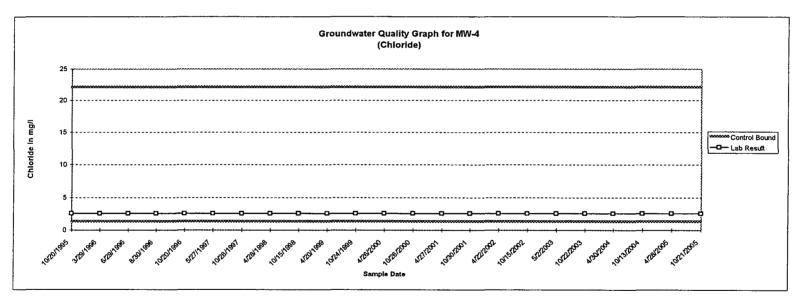

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well
- 2) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

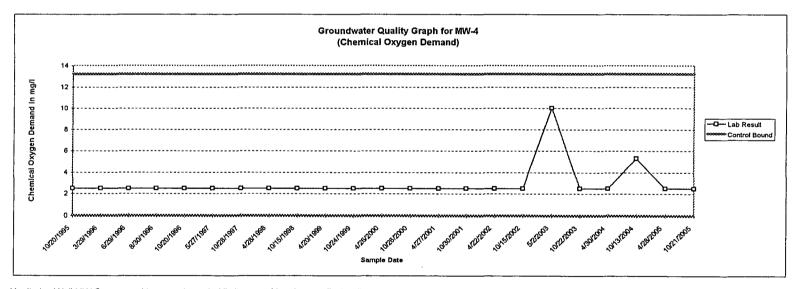

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up gradient well
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

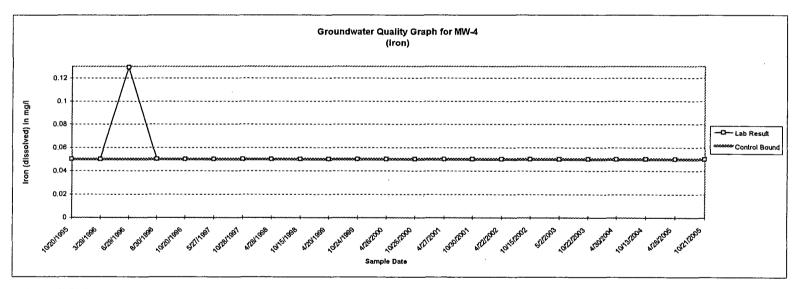

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

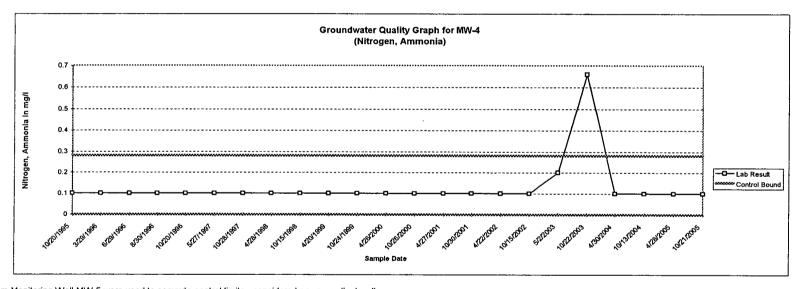

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limit of zero (0) was used for those parameters in which a negative lower control limit was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

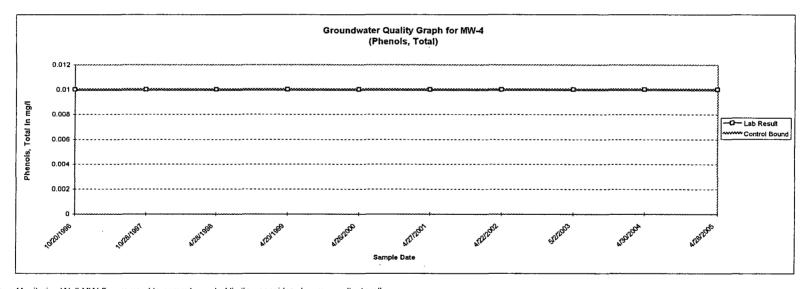

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

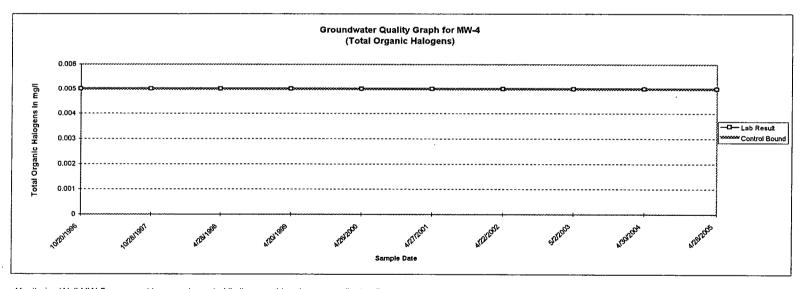

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

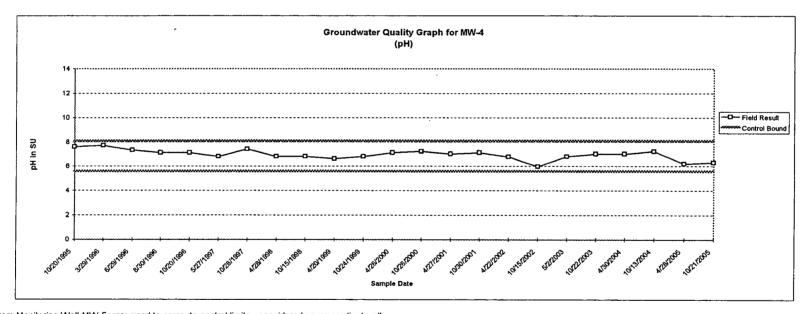

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

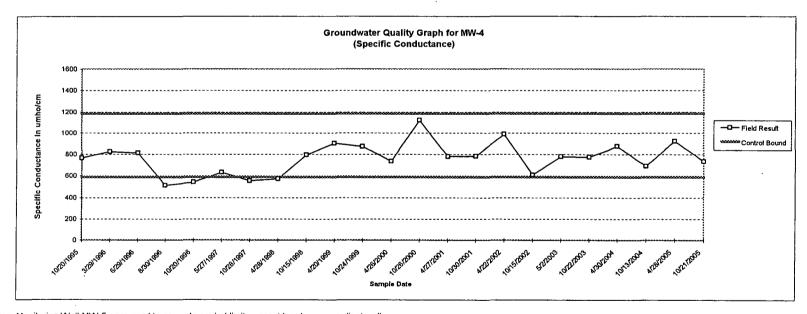

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-3

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:

TERRACON

	Stat	istical Cor	sideration	s													
	Upper	Lower			l					S	AMPLE DAT	Έ					
PARAMETER	Control	Control	MW-3	MW-3	1												
	Limit	Limit	Standard	Mean	10/20/1995	3/29/1996	6/29/1996	8/30/1996	10/20/1996	5/27/1997	10/28/1997	4/28/1998	10/15/1998	4/20/1999	10/24/1999	4/26/2000	10/26/2000
	via MW-5	via MW-5	Deviation														
Laboratory Parameters		ł													. <u>-</u> .		
Chloride (mg/l)	22.2	1.34	0.52	2.61	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Chemical Oxygen Demand (mg/l)	13.2	0.00	0.00	2.50	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.00	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.03	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.22	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01		-	-	-	0.01	-	0.01	0.01	-	0.01	•	0.01	_
Total Organic Halogens (mg/l)	0.005	0.005	0.000	0.005	-	•	-	-	0.005	-	0.005	0.005	-	0.005	-	0.005	_
	٠.																
Field Parameters	1																
pH (SU)	8.09	5.60	0.36	7.00	6.9	7.9	7.20	7.1	7.1	7.0	7.0	7.1	6.7	7.4	6.9	7.1	7.2
Specific Conductance (umho/cm)	1184	589	119	778	883	957	760	670	627	711	564	612	832	900	801	714	1022

#### NOTE

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MM.2

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:


TERRACON

	Stat	istical Con	sideration	s										
PARAMETER	Upper Control	Lower   Control	MW-3	MW-3					SAMPL	E DATE				
	Limit	Limit via MW-5	Standard	Mean	4/27/2001	10/30/2001	4/22/2002	10/15/2002	5/2/2003	10/22/2003	4/30/2004	10/13/2004	4/28/2005	10/21/2005
Laboratory Parameters	VIA IVIVV-S	VIG WIVV-5	Deviation								<del></del>			
Chloride (mg/l)	22.2	1.34	0.52	2.61	2.5	2.5	2.5.	2.5	5.0	2.5	2.5	2.5	2.5	2.5
Chemical Oxygen Demand (mg/l)	13.2	0.00	0.00	2.50	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.00	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.03	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	0.01	-	0.01	<u>-</u>	0.01	-	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.000	0.005	0.005	-	0.005	•	0.005	-	0.005	-	0.005	-
Field Parameters	<u> </u>									-				
pH (SU)	8.09	5.60	0.36	7.00	6.9	7.1	7.0	6.1	7.0	7.0	7.1	7.3	6.5	6.3
Specific Conductance (umho/cm)	1184	589	119	778	752	843	808	602	805	811	832	686	925	773

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

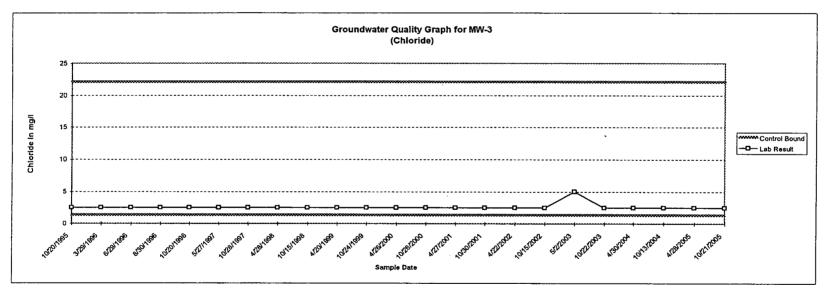

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well
- 2) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

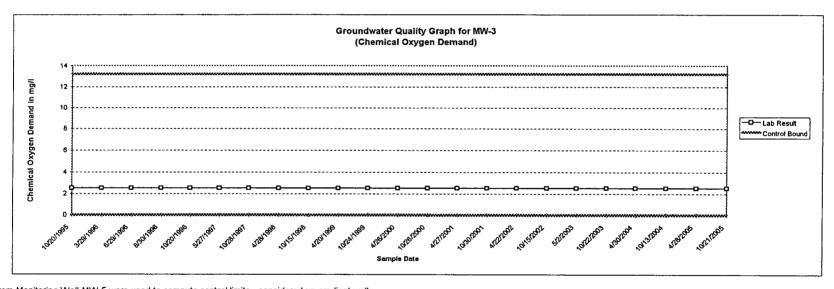

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered up gradient well
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

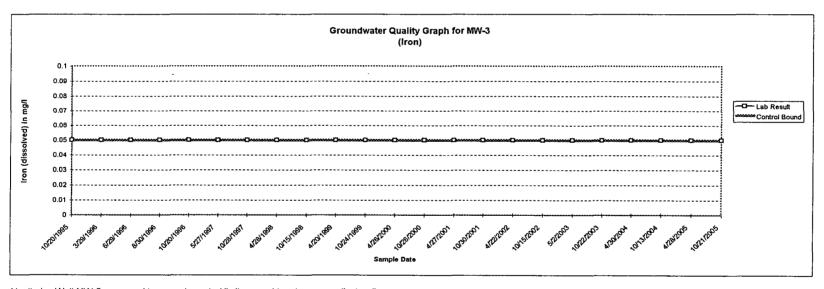

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


## SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

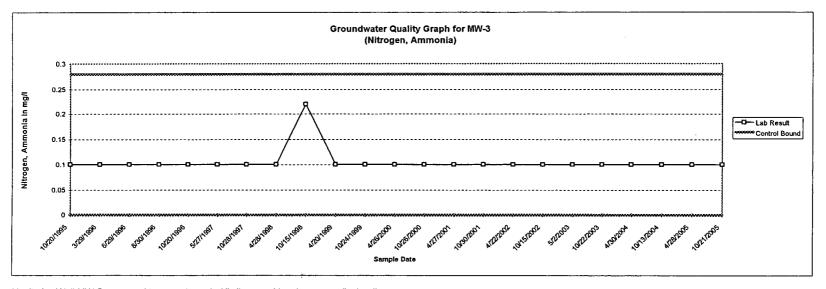

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

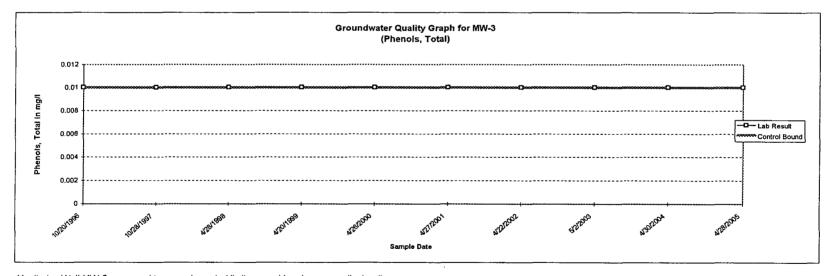


#### NOTE

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

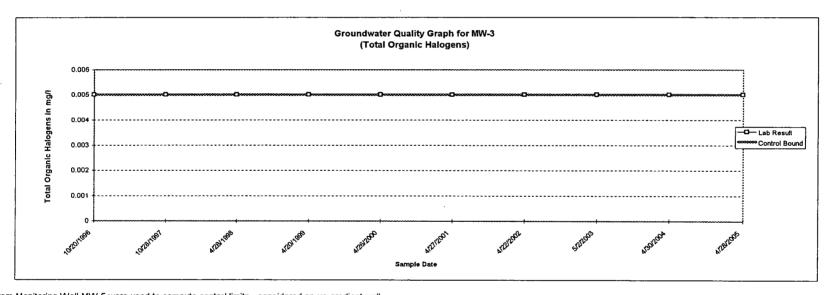

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

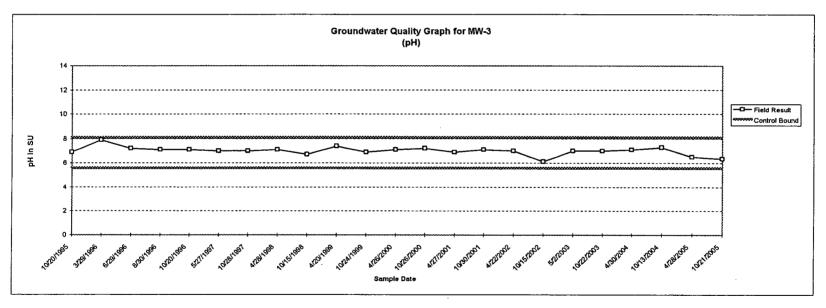

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

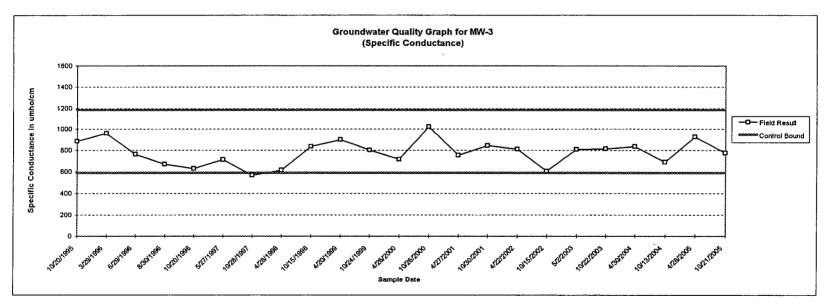

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-2

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:

TERRACON

	Stat	istical Con	sideration:	s													
PARAMETER	Upper Control	Lower Control	MW-2	MW-2						s	AMPLE DAT	E					
PARAMETER	Limit	Limit	Standard		10/20/1995	3/29/1996	6/29/1996	8/30/1996	10/20/1996	5/27/1997	10/28/1997	4/28/1998	10/15/1998	4/20/1999	10/24/1999	4/26/2000	10/27/2000
			Deviation						,								
Laboratory Parameters												,					•
Chloride (mg/l)	22.2	1.34	22.3	32.4	54.0	2.5	2.5	2.5	62	62 .	51	47	60	76	54	46.4	38
Chemical Oxygen Demand (mg/l)	13.2	0.00	11.23	8.06	9.3	7.5	20	10	7.6	2.5	7.6	2.5	2.5	2.5	5.7	7.1	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.25	0.14	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.72	0.96	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.04	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.31	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	-		-	-	0.01		0.01	0.01	-	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.024	0.026	-	-	-	-	0.089	-	0.029	0.03	-	0.036	-	0.023	-
Field Parameters	<del> </del>					•						•					
pH (SU)	8.09	5.60	0.38	6.80	6.9	7.9	7.20	7.1	6.8	6.2	6.7	6.8	6.2	6.6	6.6	7.1	6.8
Specific Conductance (umho/cm)	1184	589	357	1280	883	957	760	670	1147	1204	1030	1173	1625	2100	1434	735	1922

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-2

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:


TERRACON

	Stat	istical Con	sideration	S										
PARAMETER	Upper Control Limit	Lower Control Limit	MW-2 Standard	MW-2 Mean	4/27/2001	10/30/2001	4/22/2002	10/15/2002	<b>SAMPL</b> 5/2/2003	LE DATE 10/22/2003	4/30/2004	10/13/2004	4/28/2005	10/21/2005
		via MW-5			4/2//2001	10/30/2001	4/22/2002	10/13/2002	3/2/2003	10/22/2003	4/30/2004	10/13/2004	4/20/2003	10/2 1/2005
Laboratory Parameters														
Chloride (mg/l)	22.2	1.34	22.3	32.4	31.1	26.1	20.8	17.4	19.1	15.5	16.0	14.7	14.2	13.4
Chemical Oxygen Demand (mg/l)	13.2	0.00	11.23	8.06	2.5	2.5	2.5	10	56	7.0	2.5	6.5	2.5	6.1
Iron, dissolved (mg/l)	0.05	0.05	0.25	0.14	0.05	0.05	0.05	0.65	0.05	0.05	0.05	0.05	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.04	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	0.01	-	0.01	-	0.01	-	0.01	_	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.024	0.026	0.016	•	0.017	-	0.005	-	0.011	-	0.005	-
Field Parameters														
pH (SU)	8.09	5.60	0.38	6.80	6.7	6.7	6.9	6.6	6.5	6.7	6.6	6.9	6.4	7.43
Specific Conductance (umho/cm)	1184	589	357	1280	1300	1418	1468	1112	1431	1478	1483	1234	1574	1302

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) [for parameters reported below the MDL].
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

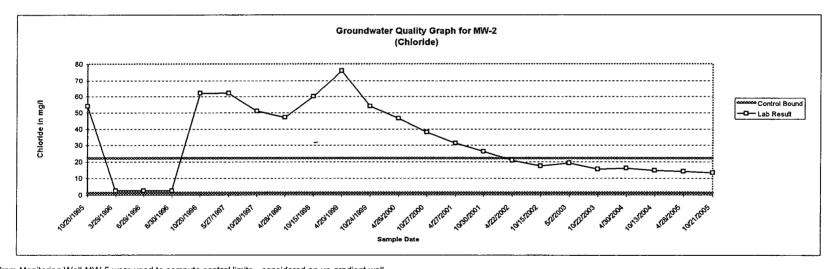


#### NOTE

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

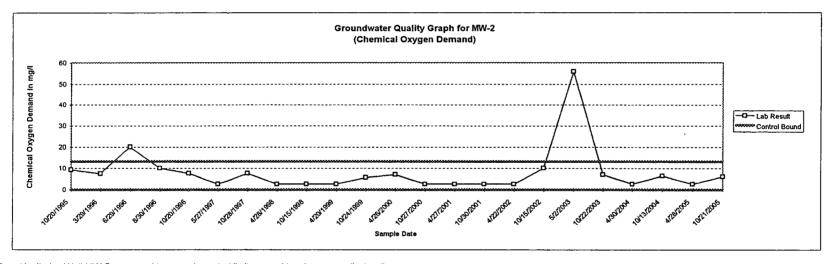


#### NOTE

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

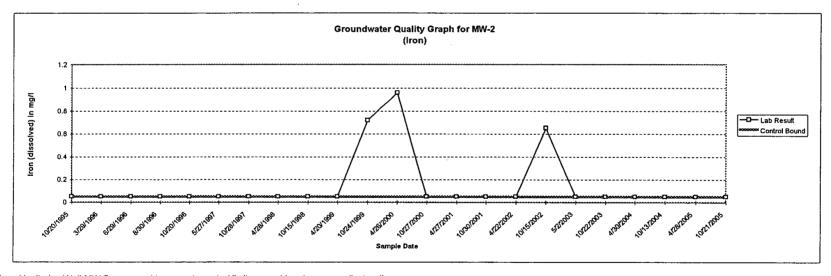

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

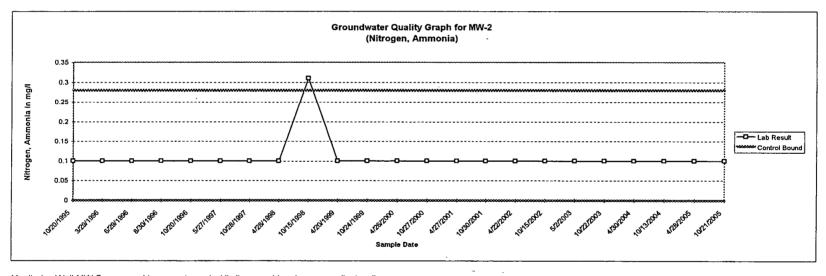

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

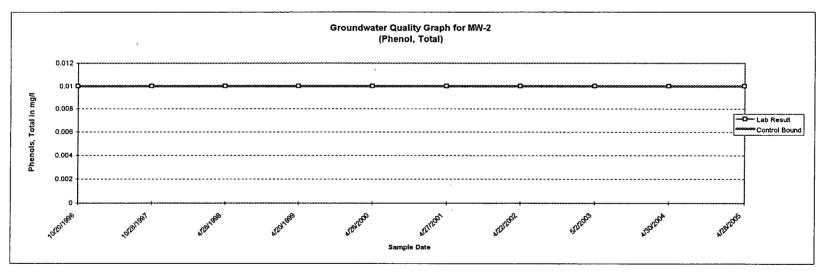

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

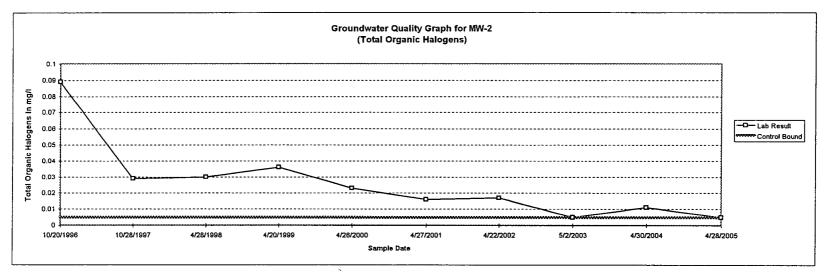

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

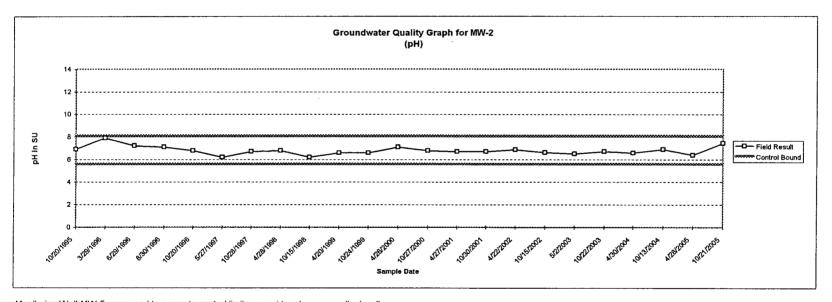

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

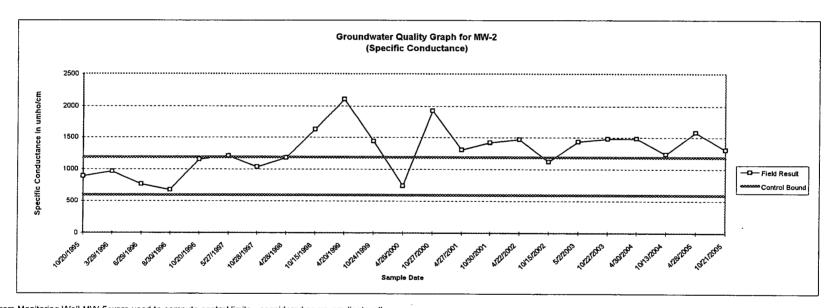

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-1

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:

TERRACON

	Stat	istical Con	sideration	s			_										
	Upper	Lower			]					s	AMPLE DAT	Έ					
PARAMETER	Control	Control	MW-1	MVV-1	]												
	Limit	Limit	Standard	Mean	10/20/1995	3/29/1996	6/29/1996	8/30/1996	10/20/1996	5/27/1997	10/28/1997	4/28/1998	10/15/1998	4/20/1999	10/24/1999	4/26/2000	10/27/2000
1	via MW-5	via MW-5	Deviation													•	
Laboratory Parameters							•										
Chloride (mg/l)	22.2	1.34	3.18	11.35	5.9	7.5	8.7	8.2	6.8	8.4	7.9	13	12	11	11	14.6	12
Chemical Oxygen Demand (mg/l)	13.2	0.00	3.92	3.91	2.5	2.5	18	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.14	0.14	0.33	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.20	0.05	0.05
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.04	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.3	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	-	-	-	-	0.01	-	0.01	0.01	•	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.056	0.031	-	-	-	-	0.19	-	0.005	0.005	•	0.018	-	0.017	-
Field Parameters	<b>†</b>							<del></del>									
pH (SU)	8.09	5.60	0.31	6.87	7.3	7.7	7.10	6.9	7.0	6.7	7.0	7.0	6.6	6.7	6.7	6.8	6.9
Specific Conductance (umho/cm)	1184	589	231	981	869	993	790	660	67 <del>9</del>	717	579	702	953	1000	868	870	1087

#### NOTE

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) (for parameters reported below the MDL).
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

SAMPLE LOCATION NO.

MW-1

(Down-gradient)

ANALYSIS PERFORMED BY:

TEST AMERICA INC.

SAMPLED BY:


TERRACON

	Stat	istical Con	sideration:	S							<del></del>			
	Upper	Lower			ŀ				SAMPL	E DATE				
PARAMETER	Control	Control	MW-1	MW-1	1									
	Limit	Limit	Standard	Mean	4/27/2001	10/30/2001	4/22/2002	10/15/2002	5/2/2003	10/22/2003	4/30/2004	10/13/2004	4/28/2005	10/21/2005
l	via MW-5	via MW-5	Deviation											
Laboratory Parameters														
Chloride (mg/l)	22.2	1.34	3.18	11.35	14.2	12.2	13	10.2	11.7	10.8	14.7	15.1	19.4	12.8
Chemical Oxygen Demand (mg/l)	13.2	0.00	3.92	3.91	11	2.5	2.5	11	2.5	2.5	2.5	2.5	2.5	2.5
Iron, dissolved (mg/l)	0.05	0.05	0.14	0.14	0.05	0.41	0.05	0.41	0.05	0.05	0.05	0.24	0.43	0.317
Nitrogen, Ammonia (mg/l)	0.28	0.00	0.04	0.11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Phenols, total (mg/l)	0.01	0.01	0.00	0.01	0.01	-	0.01	-	0.01	-	0.01	-	0.01	-
Total Organic Halogens (mg/l)	0.005	0.005	0.056	0.031	0.017	-	0.021	-	0.011	-	0.018	-	0.005	-
Field Parameters	1												·	
pH (SU)	8.09	5.60	0.31	6.87	6.8	6.8	6.9	6.9	6.5	6.6	6.6	6.9	6.3	7.45
Specific Conductance (umho/cm)	1184	589	231	981	1085	1101	1218	959	1259	1305	1391	1057	1345	1083

- 1) Results shown in bold represent one-half of the laboratory detection limt (MDL) (for parameters reported below the MDL).
- One-half of the MDL was used for parameters reported at concentrations below their respective MDL to compute their respective control limits (mean +/- two times the standard deviation for the chemicals observed at MW-5).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.
- 4) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 5) Results from Monitoring Well MW-5 were used to compute control limits considered up-gradient well

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

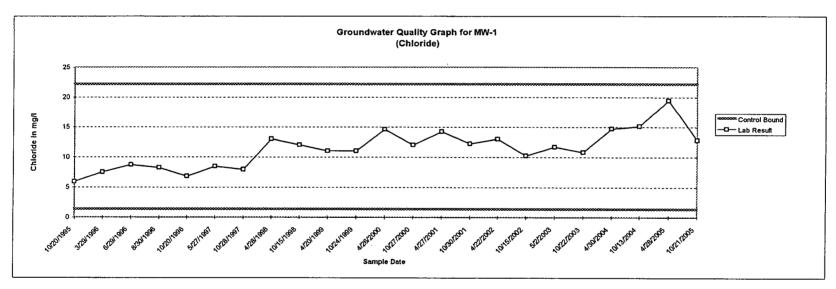

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

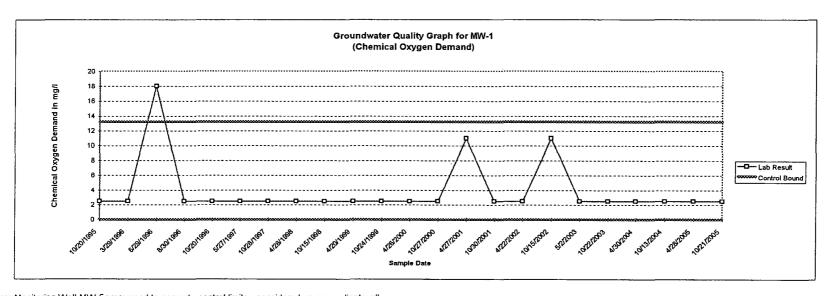

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

# MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

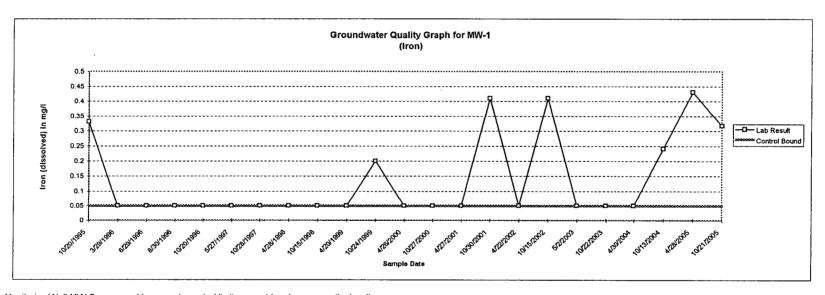

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

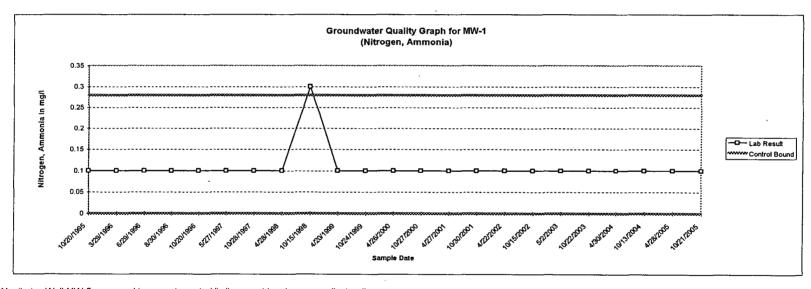

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) A lower control limt of zero (0) was used for those parameters in which a negative lower control limt was calculated.
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

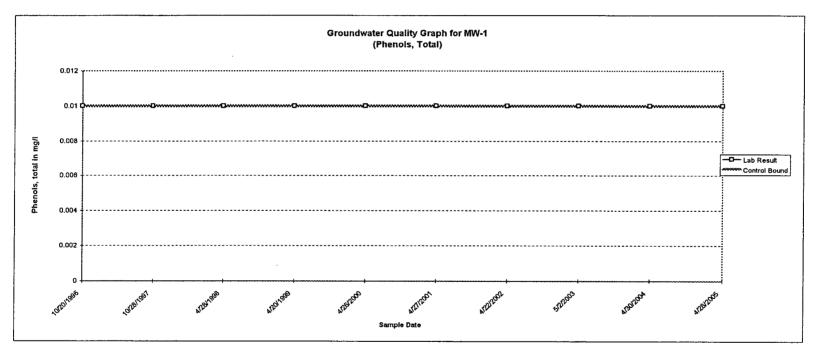

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

#### MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

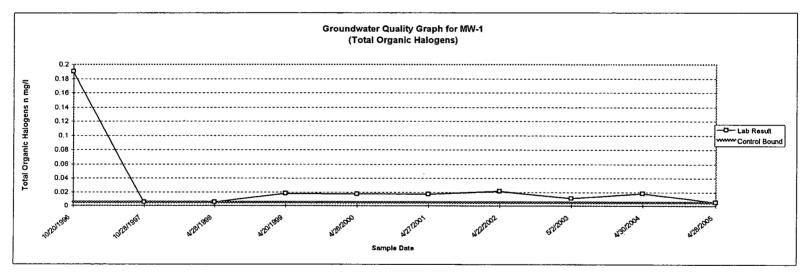

- 1) Results from Monitoring Well MW-5 were used to compute control limits considered an up-gradient well.
- 2) The same non-detectable concentration results for MW-5 resulted in a single control bound (i.e. there was no deviation from the mean of the data).
- 3) One-half of the MDL was graphed for parameters reported at concentrations below their respective MDL.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034


#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

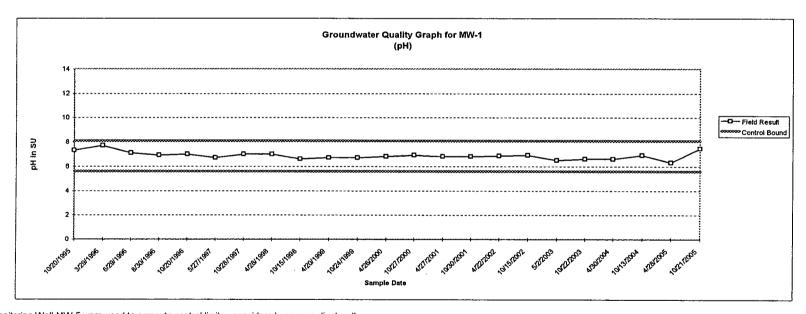

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

## MONONA COUNTY SANITARY LANDFILL MONONA COUNTY, IOWA GROUNDWATER SAMPLING AND ANALYSIS PROJECT No. 40915034

#### SEMI-ANNUAL AND ANNUAL ROUTINE PARAMETERS STATISTICAL ANALYSIS SHEET

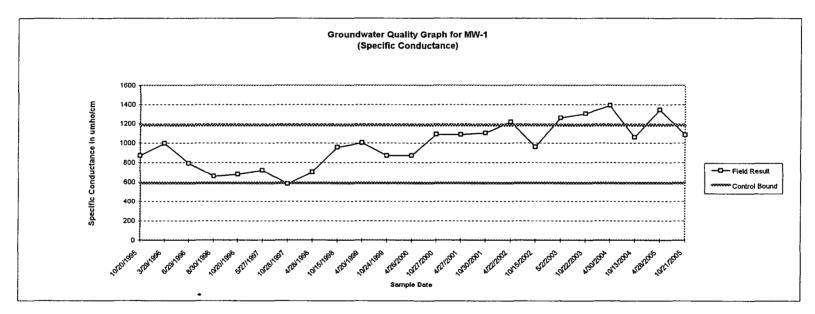

<sup>1)</sup> Results from Monitoring Well MW-5 were used to compute control limits - considered an up-gradient well.

Appendix C

## Monona County Sanitary Landfill Monona County, Iowa Terracon Project No. 40915034

## **Summary of Groundwater Elevation Measurements**

M	easurement	Dates	Dece	mber 2004	Janu	ary 2005	Febr	uary 2005	Mai	rch 2005
Location	TOC Elevation (feet)	Screened Interval Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)
MW-1	1219.73	1192.3-1177.3	NM	NM	29.2	1190.5	29.6	1190.1	29.5	1190.2
MW-2	1222.38	1192.9-1177.9	NM	NM	34.9	1187.5	35.0	1187.4	35.0	1187.4
MW-3	1266.15	1215.2-1200.2	NM	NM	48.3	1217.9	48.3	1217.9	48.0	1218.2
MW-4	1261.62	1208.6-1193.6	NM	NM	52.1	1209.5	52.2	1209.4	52.5	1209.1
MW-5	1335.73	1229.0-1214.0	NM	NM	104.7	1231.0	104.4	1231.3	105.0	1230.7

## **NOTES:**

TOC = top of casing elevation (feet)

Water level depths were measured and reported by the landfill operator with exception of levels for April and October 2005 Bold numbers represent water levels outside screened intervals

NM = Not Measured

TABLE 1

## Monona County Sanitary Landfill Monona County, Iowa Terracon Project No. 40915034

## **Summary of Groundwater Elevation Measurements**

M	easurement	Dates	Ар	ril 2005	Ma	y 2005	Ju	ne 2005	Ju	ly 2005
Location	TOC Elevation (feet)	Screened Interval Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)
MW-1	1219.73	1192.3-1177.3	31.09	1188.6	29.2	1190.5	29.0	1190.7	29.2	1190.5
MW-2	1222.38	1192.9-1177.9	36.28	1186.1	35.0	1187.4	35.0	1187.4	35.5	1186.9
MW-3	1266.15	1215.2-1200.2	52.92	1213.2	48.0	1218.2	48.3	1217.9	48.2	1218.0
MW-4	1261.62	1208.6-1193.6	53.56	1208.1	51.9	1209.7	52.0	1209.6	51.8	1209.8
MW-5	1335.73	1229.0-1214.0	106.48	1229.3	104.8	1230.9	105.0	1230.7	105.3	1230.4

## **NOTES:**

TOC = top of casing elevation (feet)

Water level depths were measured and reported by the landfill operator with exception of levels for April and October 2005

Bold numbers represent water levels outside screened intervals

NM = Not Measured

TABLE 1

# **Monona County Sanitary Landfill** Monona County, Iowa Terracon Project No. 40915034

## **Summary of Groundwater Elevation Measurements**

M	easurement	Dates	Aug	ust 2005	Septe	mber 2005	Octo	ober 2005	Nove	mber 2005
Location	TOC Elevation (feet)	Screened Interval Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)	Depth to Water (feet)	Groundwater Elevation (feet)
MW-1	1219.73	1192.3-1177.3	29.0	1190.7	29.1	1190.6	33.14	1186.59	NM	NM
MW-2	1222.38	1192.9-1177.9	35.3	1187.1	35.0	1187.4	38.48	1183.90	NM	NM
MW-3	1266.15	1215.2-1200.2	48.0	1218.2	48.2	1218.0	52.94	1213.21	NM	NM
MW-4	1261.62	1208.6-1193.6	51.6	1210.0	52.1	1209.5	54.77	1206.85	NM	NM
MW-5	1335.73	1229.0-1214.0	104.9	1230.8	104.8	1230.9	106.59	1229.14	NM	NM

## NOTES:

TOC = top of casing elevation (feet)

Water level depths were measured and reported by the landfill operator with exception of levels for April and October 2005 Bold numbers represent water levels outside screened intervals

NM = Not Measured

## TABLE 2

# Monona County Sanitary Landfill Monona County, Iowa Terracon Project No. 40915034

# **Summary of Leachate Measurements**

Location						Measurem						
	Dec 2004	Jan 2005	Feb 2005	Mar 2005	Apr 2005	May 2005	Jun 2005	Jul 2005	Aug 2005	Sep 2005	Oct 2005	Nov 2005
LW-1 LW-2 LW-3	NM NM NM	dry dry dry	dry dry dry	dry dry dry	5.74* 34.85* dry	dry dry dry	dry dry dry	dry dry dry	dry dry dry	dry dry dry	2.23* 20.96* dry	dry dry dry

## NOTES:

Values presented above represent leachate thicknesses in feet above the bottom of the leachate well.

Leachate levels measured by landfill operator, except for the months of April and October when leachate levels were measured by Terracon. NM indicates not measured.

<sup>\*</sup> Indicates uncertainty of actual leachate level measurement. Measurement may represent detection of condensation on inner well casing by electronic water level indicator.

TABLE 3

# Monona County Sanitary Landfill Monona County, Iowa Terracon Project No. 40915034

# **Summary of Hydraulic Conductivity Measurements**

		MO	NITORING WE	LLS	
DATE	MW-1	MW-2	MW-3	MW-4	MW-5
Nov - 1992	8.10E-05	4.00E-04	4.20E-05	3.00E-05	1.60E-05
Oct - 1998	2.03E-04	1.18E-03	5.53E-05	1.70E-05	2.10E-05
Oct - 2003	1.04E-04	7.27E-05	2.70E-05	2.72E-05	6.07E-05

Hydraulic conductivity values given in units of centimeters per second (cm/sec).